



Carri Chef 2 – Control valve replacement

TOOLS REQUIRED:

- 1x Cross-head screwdriver**
- 1x Flat-blade screwdriver**




Introduction:

Following is a tutorial on how to remove the control valve of a Cadac Carri chef 2.

STEP 1:

**Remove the three screws
securing heat shield in place.**

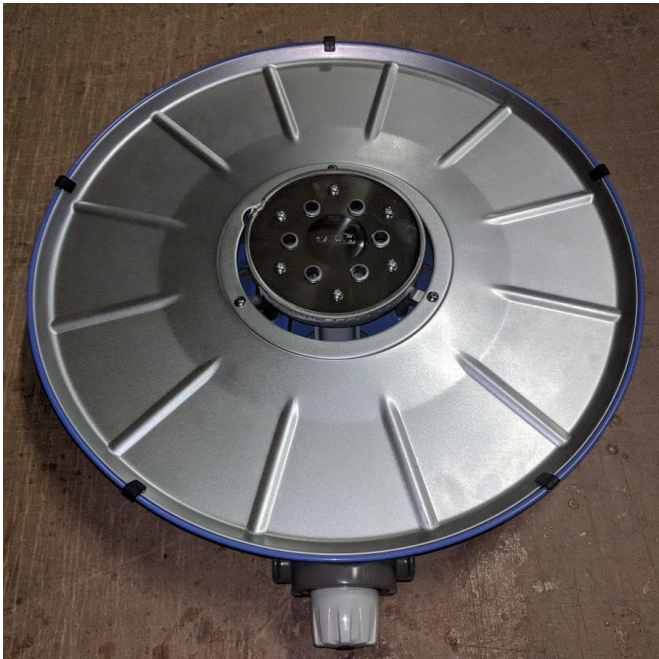

STEP 2:

Carefully insert the flat screwdriver under the heat shield and prise it up and over the outside edge.

You should then be able to remove the heat shield.

1.



2.




3.







STEP 4:

Slide the piezo wire rubber sleeve back to reveal the connection. Then pull the two ends apart.

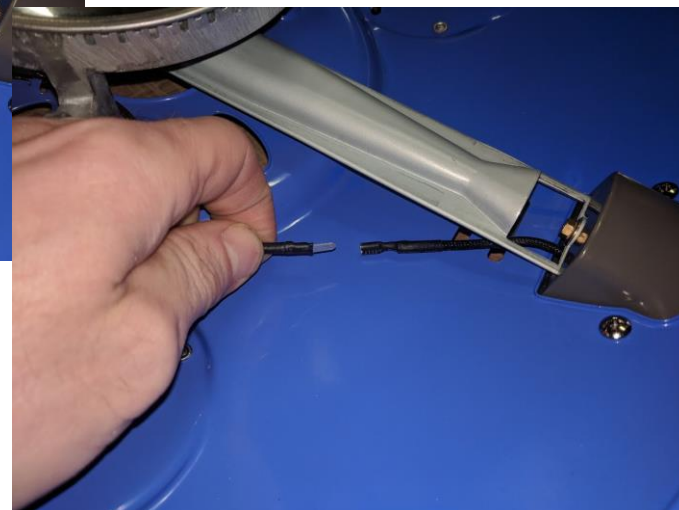

STEP 5:

Unscrew the three screws securing the control module in place and then pull out to remove.

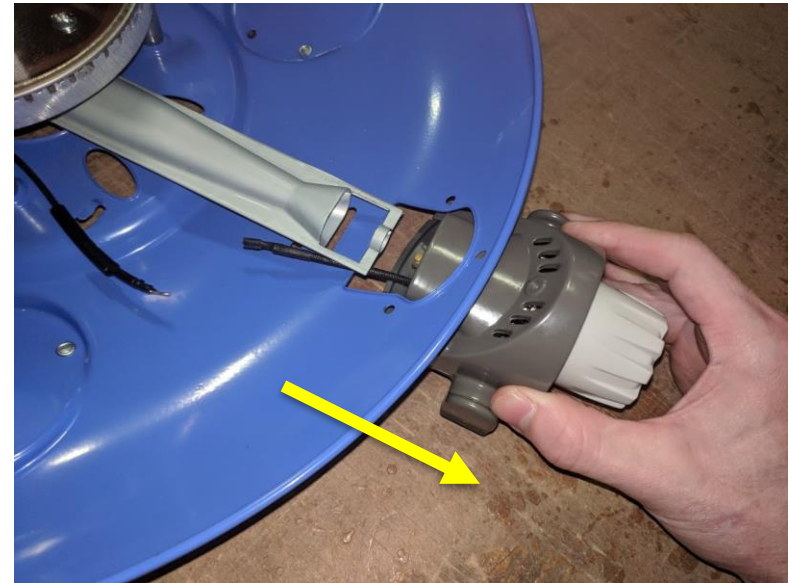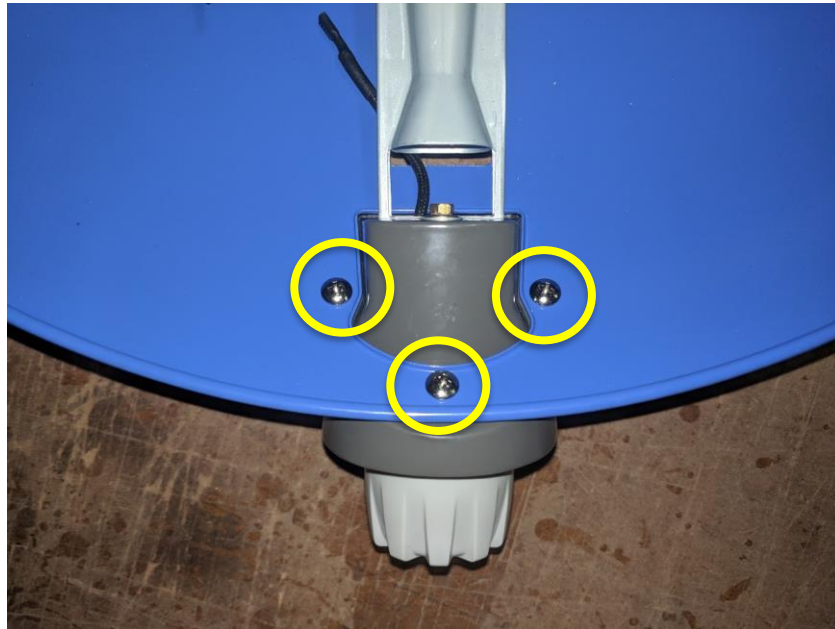

STEP 6:



Use a finger nail to remove the blue cap. Remove the securing screw. The control knob will then pull off.



STEP 8:

**Remove the two control valve
mechanism securing screws.**

The valve will then lift free.

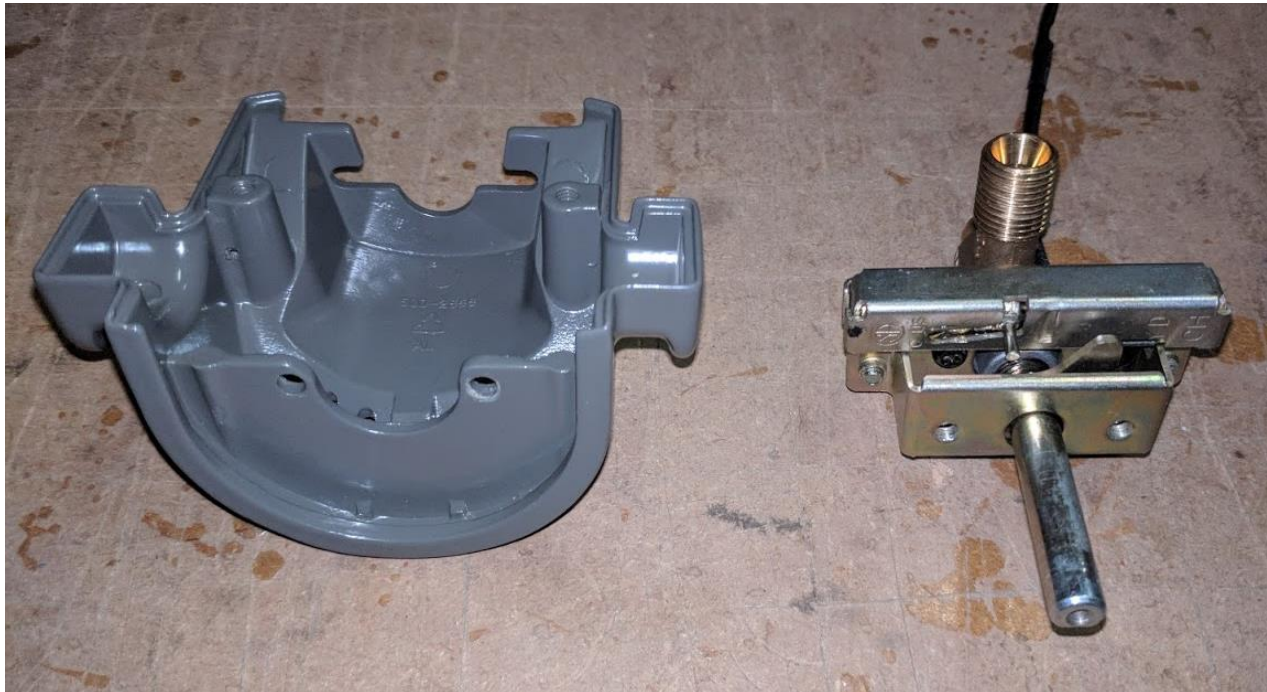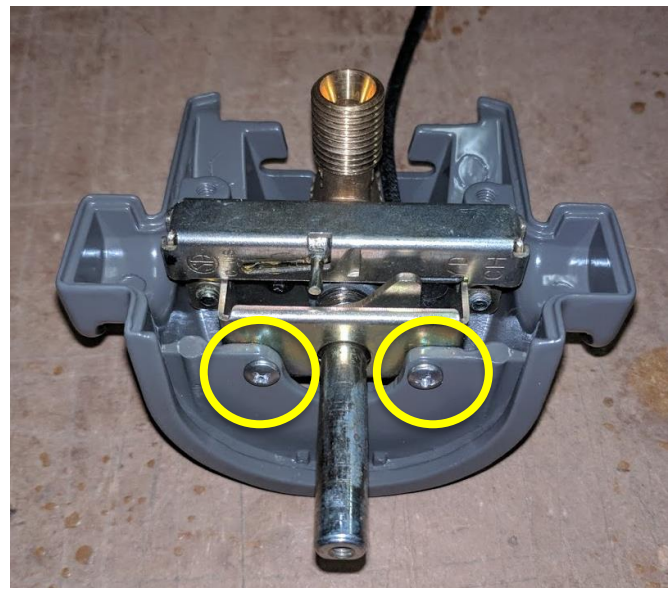

Refit is the reverse of the removal procedure making sure all screws are securely tightened.

